


SUPERIOR

OIL FILTRATION SYSTEM FOR USE WITH GUARDIAN® HORIZONTAL SCREEN



FRONT VIEW

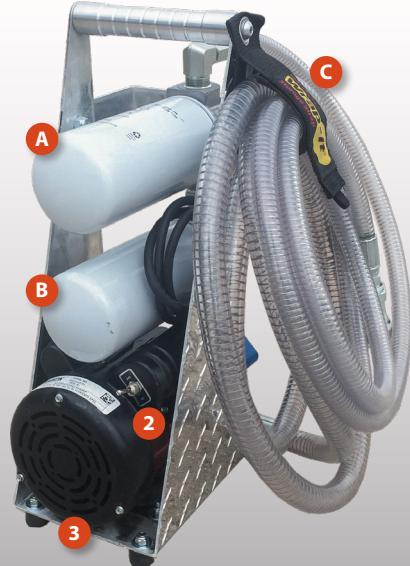

BACK VIEW

1. Carry Handle
2. On/Off Switch
3. Electric Motor
4. Aluminum Plate
5. House Hook-up
6. Pop-up Indicator
7. Hydraulic Pump

STANDARD FEATURES

FEATURES

- » Prolong oil life
- » Save on new lube and dispose of old
- » Portable and compact
- » Heavy duty aluminum diamond plate
- » Two-stage filter design
- » Strap secure hose for transport
- » Quick couplers for simple setup
- » Sealed power switch protected from elements
- » 20-minute cycle times

APPLICATIONS

- » Pre-Filter new oil
- » Dispense new oil
- » Transfer oil
- » Top off reservoirs

SPECIFICATIONS

- » 20" x 12" x 7" (508 x 305 x 178 mm)
- » 46 pounds (21 kg) (dry-no oil)
- » 1/4HP, 115VAC, 60HZ electric motor
- » 4'(1 m) motor cord
- » 1 GPM (3.78) gear pump
- » (2) 10'(2 m) clear PVC suction and discharge hoses
- » Pop-up differential indicators trigger at 50 psid
- » Pump relief opens at 150 PSI
- » Ambient temperature range of:
32° - 120° F (0° - 50° C)

REPLACEMENT PARTS

	Part Number	Part
A	08-09131	First Stage Filter
B	08-09132	Second Stage Filter
C	08-09133	Replacement Hose Kit
D	08-09134	Complete Kit